

PRODUCT INFORMATION SHEET

Threaded Rod

Lengths:


Supplied in 1m or 3m lengths with a pre-cutting service available.

Finishes:

BZP - Zinc Electroplated to BS EN 15048
 HDG - (See Seperate Data Sheet)
 S/S - (See Seperate Data Sheet)

Grade: 4.6 - DIN 976-1


Thread: Metric

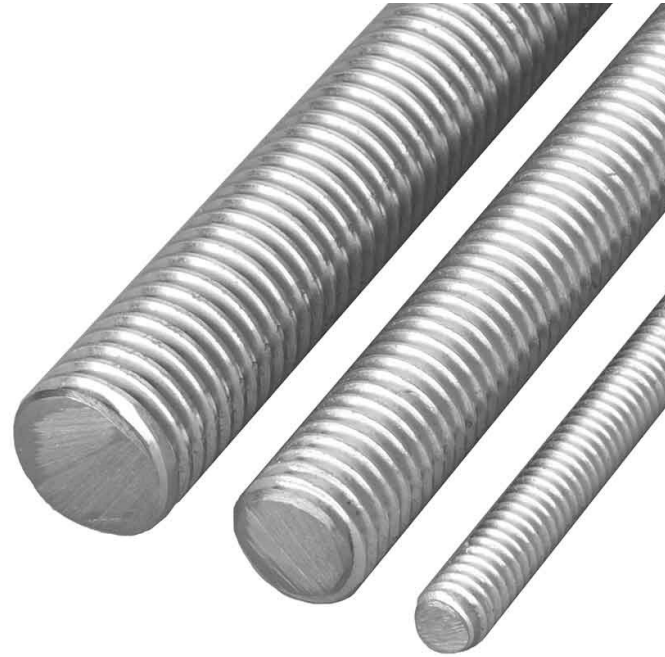

Product Information (BZP)

Stock Code	Thread	Length	Bundle Qty	Weight/Mtr (kg)	Safe Working Load (SWL)* (Fz)
14800	M6	1m	50	0.18	Contact us
14802	M8	1m	25	0.32	4.28kN / 436.3kg
14804	M10	1m	20	0.51	7.54kN / 768.6kg
14806	M12	1m	10	0.74	8.97kN / 914.7kg
14808	M16	1m	5	1.35	Contact us
14810	M20	1m	5	2.11	Contact us

Stock Code	Thread	Length	Bundle Qty	Weight/Mtr (kg)	Safe Working Load (SWL)* (Fz)
14801	M6	3m	50	0.18	Contact us
14803	M8	3m	25	0.32	4.28kN / 436.3kg
14805	M10	3m	20	0.51	7.54kN / 768.6kg
14807	M12	3m	10	0.74	8.97kN / 914.7kg
14809	M16	3m	5	1.35	Contact us
14811	M20	3m	5	2.11	Contact us

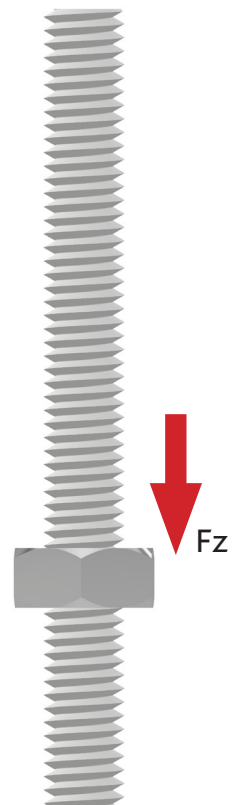

*Please note, SWL test data is based upon a hex nut threaded onto the studding.

All data provided is correct at the time of print, but is subject to change by Kernow Fixings; please contact one of the Kernow team on 01726 624600 or sales@kernow-how.com to obtain the latest product information at the time of purchase.