

PRODUCT INFORMATION SHEET

Cable Ladder - Inside Riser 90°

Heavy Duty - 125mm

Material:

Mild steel BS EN 10149-3 grade s280 with a min yield of 280N/mm².

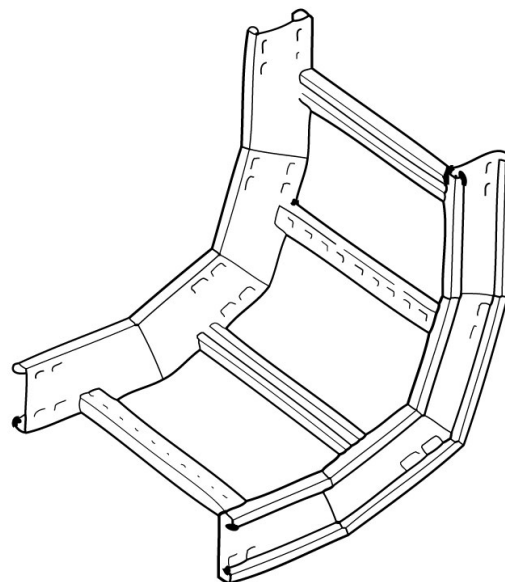
Ultimate tensile strength of 370N/mm².

Finish:

Hot Dipped Galvanised (HDG) to BS EN ISO 1461: (To a mean minimum coating thickness of 55 µm.)

Rungs:

To alternately face up & down at spacings no greater than 300mm.
 Rung quantity may vary.


Gauge: 2.0mm

Stock Code	Width (mm)	Weight (kg)
34270	150	3.4
34271	300	3.7
34272	450	4.1
34273	600	4.4
34274	750	5.2
34275	900	5.6

For further product information, please contact one of the Kernow team on 01726 624600 or sales@kernow-how.com